

Designer's™ Data Sheet

Insulated Gate Bipolar Transistor with Anti-Parallel Diode

N-Channel Enhancement-Mode Silicon Gate



MGY40N60D

Motorola Preferred Device

IGBT & DIODE IN TO-264
40 A @ 90°C
66 A @ 25°C
600 VOLTS
SHORT CIRCUIT RATED

This Insulated Gate Bipolar Transistor (IGBT) is co-packaged with a soft recovery ultra-fast rectifier and uses an advanced termination scheme to provide an enhanced and reliable high voltage-blocking capability. Short circuit rated IGBT's are specifically suited for applications requiring a guaranteed short circuit withstand time such as Motor Control Drives. Fast switching characteristics result in efficient operations at high frequencies. Co-packaged IGBT's save space, reduce assembly time and cost.

- Industry Standard High Power TO-264 Package (TO-3PBL)
- High Speed E_{off} : 60 μ J per Amp typical at 125°C
- High Short Circuit Capability – 10 μ s minimum
- Soft Recovery Free Wheeling Diode is included in the package
- Robust High Voltage Termination
- Robust RBSOA



CASE 340G-02, Style 5
TO-264

MAXIMUM RATINGS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

| Rating | Symbol | Value | Unit |
|---|---|--------------------|------------------------------|
| Collector-Emitter Voltage | V_{CES} | 600 | Vdc |
| Collector-Gate Voltage ($R_{GE} = 1.0 \text{ M}\Omega$) | V_{CGR} | 600 | Vdc |
| Gate-Emitter Voltage — Continuous | V_{GE} | ± 20 | Vdc |
| Collector Current — Continuous @ $T_C = 25^\circ\text{C}$ — Continuous @ $T_C = 90^\circ\text{C}$ — Repetitive Pulsed Current (1) | I_{C25} I_{C90} I_{CM} | 66 40 132 | Adc Apc |
| Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C | P_D | 260 2.08 | Watts W/ $^\circ\text{C}$ |
| Operating and Storage Junction Temperature Range | T_J, T_{stg} | -55 to 150 | $^\circ\text{C}$ |
| Short Circuit Withstand Time ($V_{CC} = 360 \text{ Vdc}$, $V_{GE} = 15 \text{ Vdc}$, $T_J = 25^\circ\text{C}$, $R_G = 20 \Omega$) | t_{sc} | 10 | μs |
| Thermal Resistance — Junction to Case — IGBT — Junction to Case — Diode — Junction to Ambient | $R_{\theta JC}$ $R_{\theta JD}$ $R_{\theta JA}$ | 0.48 1.13 35 | $^\circ\text{C/W}$ |
| Maximum Lead Temperature for Soldering Purposes, 1/8" from case for 5 seconds | T_L | 260 | $^\circ\text{C}$ |
| Mounting Torque, 6-32 or M3 screw | 10 lbf•in (1.13 N•m) | | |

(1) Pulse width is limited by maximum junction temperature.

Designer's Data for "Worst Case" Conditions — The Designer's Data Sheet permits the design of most circuits entirely from the information presented. SOA Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

Preferred devices are Motorola recommended choices for future use and best overall value.

MGY40N60D

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|--|--|---------------------|----------------------|-------------------|--------------|
| OFF CHARACTERISTICS | | | | | |
| Collector-to-Emitter Breakdown Voltage (V _{GE} = 0 Vdc, I _C = 250 μAdc) Temperature Coefficient (Positive) | BV _{CES} | 600 — | — 870 | — — | Vdc mV/°C |
| Zero Gate Voltage Collector Current (V _{CE} = 600 Vdc, V _{GE} = 0 Vdc) (V _{CE} = 600 Vdc, V _{GE} = 0 Vdc, T _J = 125°C) | I _{CES} | — — | — — | 100 2500 | μAdc |
| Gate-Body Leakage Current (V _{GE} = ± 20 Vdc, V _{CE} = 0 Vdc) | I _{GES} | — | — | 250 | nAdc |
| ON CHARACTERISTICS (1) | | | | | |
| Collector-to-Emitter On-State Voltage (V _{GE} = 15 Vdc, I _C = 20 Adc) (V _{GE} = 15 Vdc, I _C = 20 Adc, T _J = 125°C) (V _{GE} = 15 Vdc, I _C = 40 Adc) | V _{CE(on)} | — — — | 2.20 2.10 2.60 | 2.80 — 3.25 | Vdc |
| Gate Threshold Voltage (V _{CE} = V _{GE} , I _C = 1 mAdc) Threshold Temperature Coefficient (Negative) | V _{GE(th)} | 4.0 — | 6.0 10 | 8.0 — | Vdc mV/°C |
| Forward Transconductance (V _{CE} = 10 Vdc, I _C = 40 Adc) | g _{fe} | — | 12 | — | Mhos |
| DYNAMIC CHARACTERISTICS | | | | | |
| Input Capacitance | (V _{CE} = 25 Vdc, V _{GE} = 0 Vdc, f = 1.0 MHz) | C _{ies} | — | 6810 | pF |
| Output Capacitance | | C _{oes} | — | 464 | |
| Transfer Capacitance | | C _{res} | — | 15 | |
| SWITCHING CHARACTERISTICS (1) | | | | | |
| Turn-On Delay Time | (V _{CC} = 360 Vdc, I _C = 40 Adc, V _{GE} = 15 Vdc, L = 300 μH R _G = 20 Ω, T _J = 25°C) Energy losses include “tail” | t _{d(on)} | — | 126 | ns |
| Rise Time | | t _r | — | 95 | |
| Turn-Off Delay Time | | t _{d(off)} | — | 530 | |
| Fall Time | | t _f | — | 180 | |
| Turn-Off Switching Loss | | E _{off} | — | 1.50 | mJ |
| Turn-On Switching Loss | | E _{on} | — | 2.30 | |
| Total Switching Loss | | E _{ts} | — | 3.80 | |
| Turn-On Delay Time | (V _{CC} = 360 Vdc, I _C = 40 Adc, V _{GE} = 15 Vdc, L = 300 μH R _G = 20 Ω, T _J = 125°C) Energy losses include “tail” | t _{d(on)} | — | 113 | ns |
| Rise Time | | t _r | — | 104 | |
| Turn-Off Delay Time | | t _{d(off)} | — | 588 | |
| Fall Time | | t _f | — | 346 | |
| Turn-Off Switching Loss | | E _{off} | — | 2.70 | mJ |
| Turn-On Switching Loss | | E _{on} | — | 3.80 | |
| Total Switching Loss | | E _{ts} | — | 6.50 | |
| Gate Charge | (V _{CC} = 360 Vdc, I _C = 40 Adc, V _{GE} = 15 Vdc) | Q _T | — | 248 | nC |
| | | Q ₁ | — | 49 | |
| | | Q ₂ | — | 81 | |
| DIODE CHARACTERISTICS | | | | | |
| Diode Forward Voltage Drop (I _{EC} = 20 Adc) (I _{EC} = 20 Adc, T _J = 125°C) (I _{EC} = 40 Adc) | V _{FEC} | — — — | 1.19 1.04 1.36 | 1.70 — 2.00 | Vdc |

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

(continued)

ELECTRICAL CHARACTERISTICS — continued ($T_J = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|--|----------|-----|-----|-----|---------------|
| DIODE CHARACTERISTICS — continued | | | | | |
| Reverse Recovery Time | t_{rr} | — | 138 | — | ns |
| | t_a | — | 78 | — | |
| | t_b | — | 60 | — | |
| Reverse Recovery Stored Charge | Q_{RR} | — | 2.1 | — | μC |
| Reverse Recovery Time | t_{rr} | — | 213 | — | ns |
| | t_a | — | 122 | — | |
| | t_b | — | 91 | — | |
| Reverse Recovery Stored Charge | Q_{RR} | — | 4.9 | — | μC |
| INTERNAL PACKAGE INDUCTANCE | | | | | |
| Internal Emitter Inductance (Measured from the emitter lead 0.25" from package to emitter bond pad) | L_E | — | 13 | — | nH |

TYPICAL ELECTRICAL CHARACTERISTICS

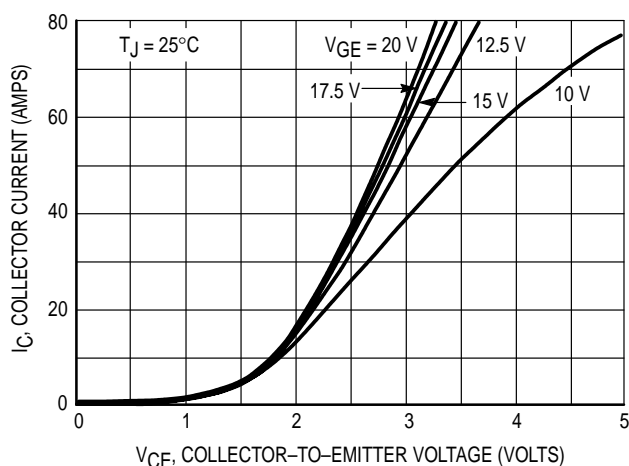


Figure 1. Output Characteristics, $T_J = 25^\circ\text{C}$

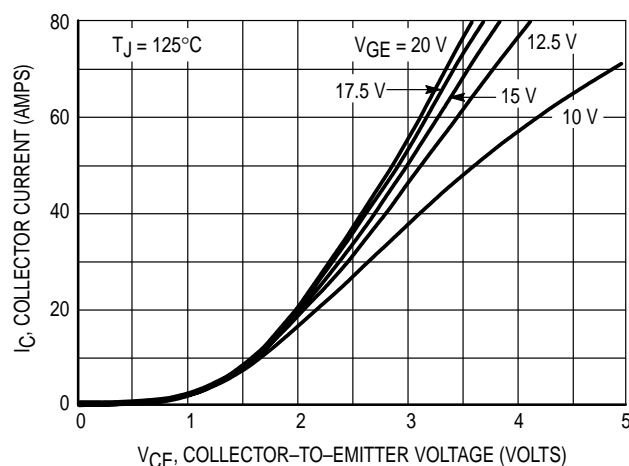


Figure 2. Output Characteristics, $T_J = 125^\circ\text{C}$

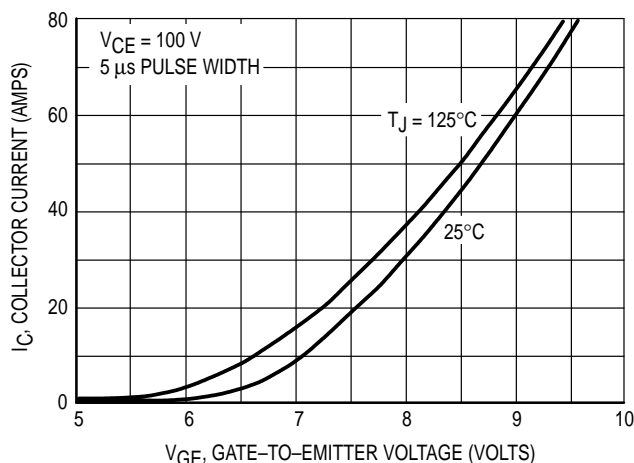


Figure 3. Transfer Characteristics

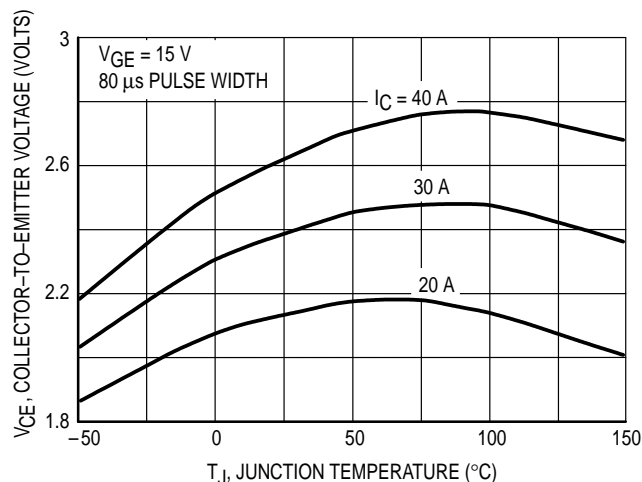


Figure 4. Collector-to-Emitter Saturation Voltage versus Junction Temperature

MGY40N60D

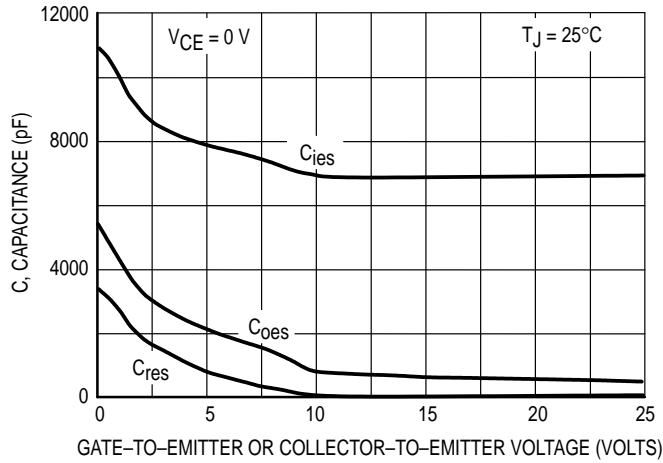


Figure 5. Capacitance Variation

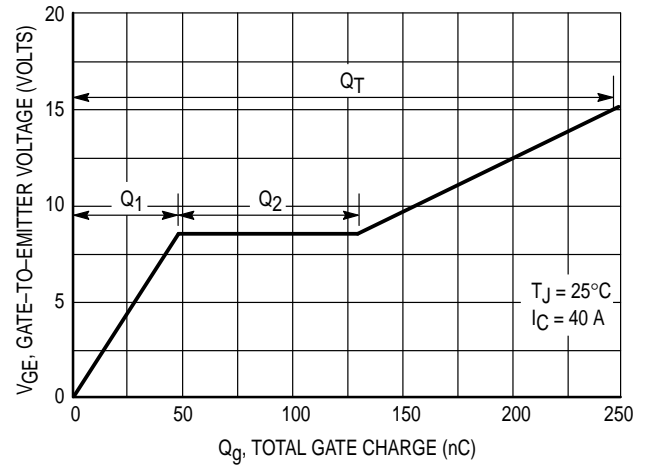


Figure 6. Gate-to-Emitter Voltage versus Total Charge

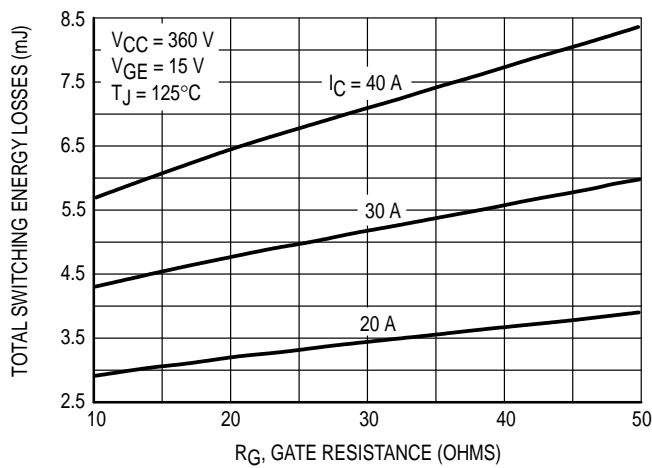


Figure 7. Total Switching Losses versus Gate Resistance

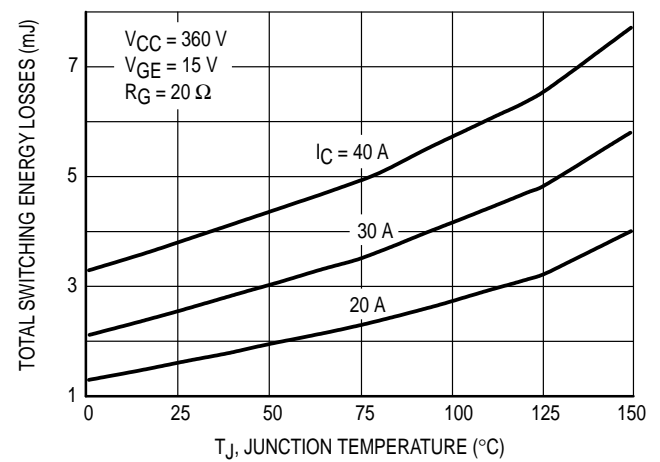


Figure 8. Total Switching Losses versus Junction Temperature

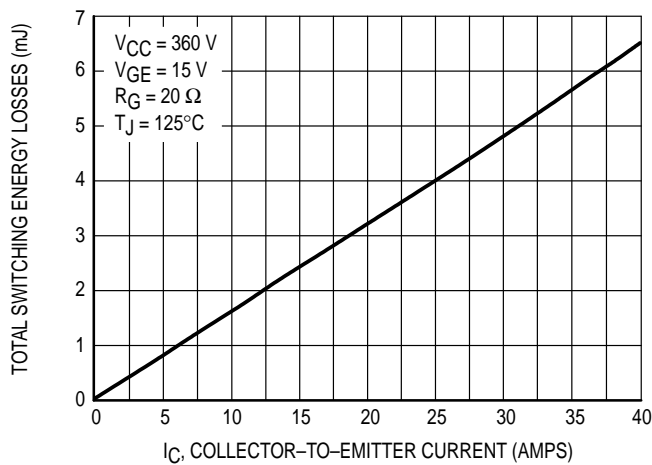


Figure 9. Total Switching Losses versus Collector-to-Emitter Current

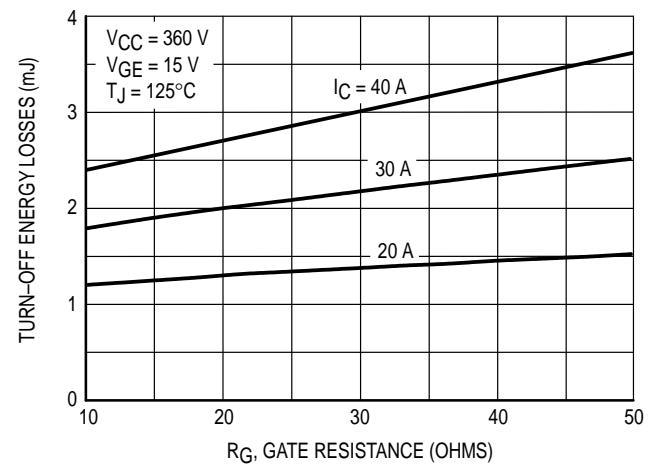


Figure 10. Turn-Off Losses versus Gate Resistance

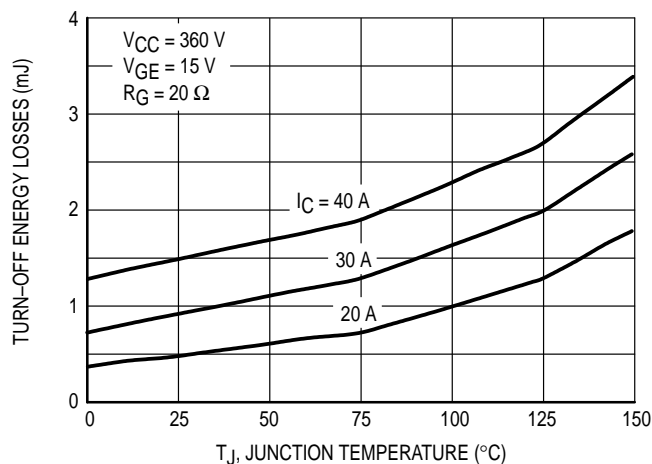


Figure 11. Turn-Off Losses versus Junction Temperature

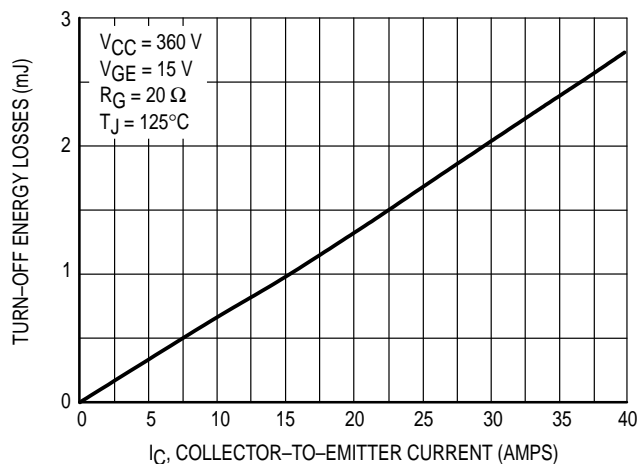


Figure 12. Turn-Off Losses versus Collector-to-Emitter Current

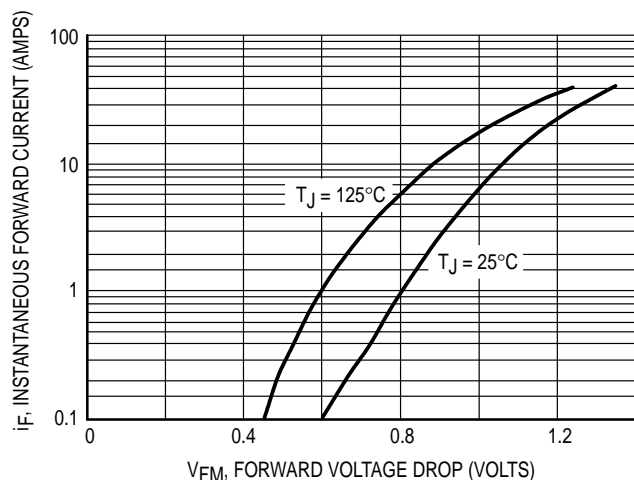


Figure 13. Typical Diode Forward Drop versus Instantaneous Forward Current


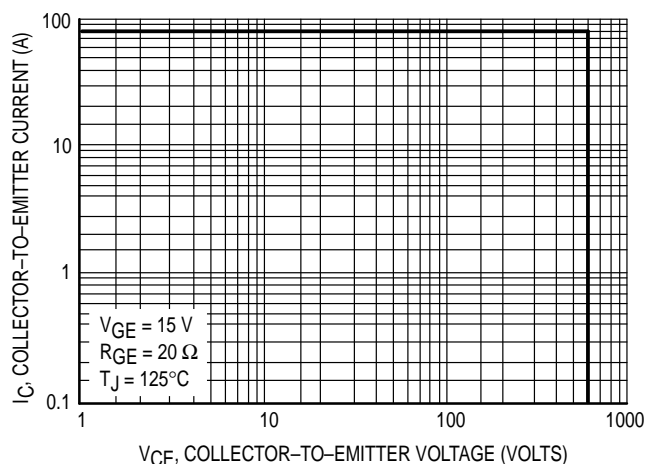


Figure 14. Reverse Biased Safe Operating Area

PACKAGE DIMENSIONS

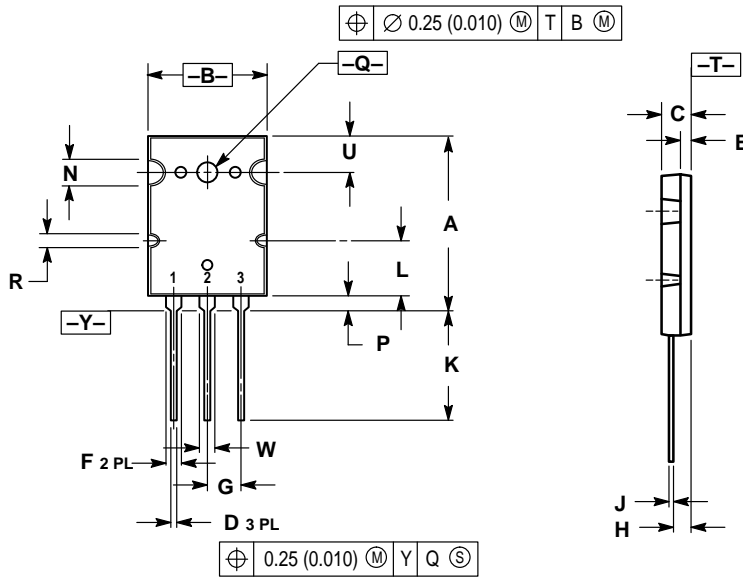


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: MILLIMETER.

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 2.8 | 2.9 | 1.102 | 1.142 |
| B | 19.3 | 20.3 | 0.760 | 0.800 |
| C | 4.7 | 5.3 | 0.185 | 0.209 |
| D | 0.93 | 1.48 | 0.037 | 0.058 |
| E | 1.9 | 2.1 | 0.075 | 0.083 |
| F | 2.2 | 2.4 | 0.087 | 0.102 |
| G | 5.45 BSC | | 0.215 BSC | |
| H | 2.6 | 3.0 | 0.102 | 0.118 |
| J | 0.43 | 0.78 | 0.017 | 0.031 |
| K | 17.6 | 18.8 | 0.693 | 0.740 |
| L | 11.0 | 11.4 | 0.433 | 0.449 |
| N | 3.95 | 4.75 | 0.156 | 0.187 |
| P | 2.2 | 2.6 | 0.087 | 0.102 |
| Q | 3.1 | 3.5 | 0.122 | 0.137 |
| R | 2.15 | 2.35 | 0.085 | 0.093 |
| U | 6.1 | 6.5 | 0.240 | 0.256 |
| W | 2.8 | 3.2 | 0.110 | 0.125 |

STYLE 5:
 PIN 1. GATE
 2. COLLECTOR
 3. EMITTER

**CASE 340G-02
 TO-264
 ISSUE E**

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
 P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447 or 602-303-5454

MFAX: RMFAX0@email.sps.mot.com - TOUCHTONE 602-244-6609
INTERNET: <http://Design-NET.com>

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, 6F Seibu-Butsuryu-Center,
 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-81-3521-8315

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

